


PK 12N40 PETQ



13,8 mm

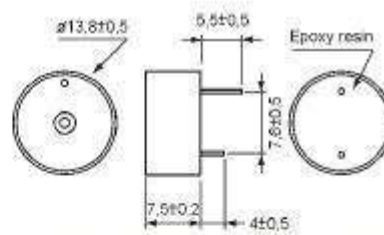

Technical Parameters

Sound Frequency
Operating Voltage
SPL at 5V
Current Consumption
Operating Temperature

PK 12N40 PETQ

4,1 kHz
3 - 15 VDC
83 dB/10cm
10 mA
-20°C to +90°C

PK 20N38 PQ



23,4 mm



Technical Parameters

Sound Frequency
Operating Voltage
SPL at 5V
Current Consumption

PK 20N38 PQ

3,8 kHz
3 - 28 VDC
85 dB/10cm
12 mA

Operating Temperature -20°C to +70°C

PK 21N30 PQ



24 mm




Technical Parameters	PK 21N30 PQ
Sound Frequency	3,0 kHz
Operating Voltage	1,5 - 30 VDC
SPL at 5V	80 dB/10cm
Current Consumption	12 mA
Operating Temperature	-20°C to +70°C

PK 27N35 PQ



30 mm

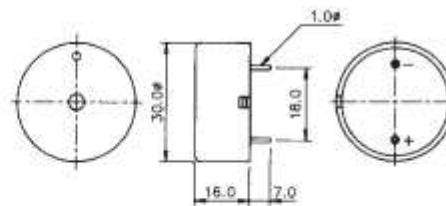

Technical Parameters	PK 27N35 PQ
Sound Frequency	3,5 kHz
Operating Voltage	3 - 28 VDC
SPL at 5V	90 dB/10cm
Current Consumption	15 mA
Operating Temperature	-20°C to +70°C